


Air Scissor Lift Tables

Page 5

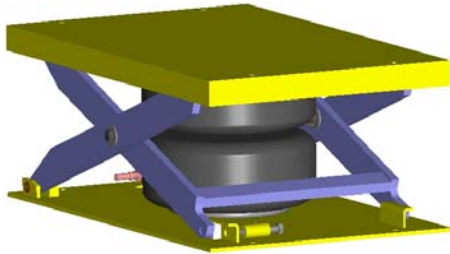

Description:

Our model LSA05 by Enkon Systems is one of a number of small foot prints size scissor lift tables available. The scissor lift table is constructed using high strength steel and utilizes solid plates on the top and the base. The scissor lift table works well for raising and lowering loads into position at short distances. The lift base is 25" x 40", has a capacity up to 3000 pounds and travel up to 11". Manufactured for heavy use in harsh environments.


Model LSA05

Standard features include:


- Quick and inexpensive installation, simply bolt scissor lift table to floor and connect air line
- Clean and green air power scissor lift table
- Powered by our patented Air Bag Technology
- Platform standard size 25 x 40 (see chart on next page for custom top plates sizes)
- Hand pedestal control
- Internal non-pilot quick exhaust valve for fast down speed
- Safety relief valve mounted internally to prevent over-inflation of the air bag
- Maintenance stop block
- High-strength steel components
- High torque load bearings lubricated for life to eliminate maintenance time and costs
- Pivot joints secured in-place with triple locking system to keep operators safe
- Meets or exceeds all safety parameters based on ANSI MH29.2 and OSHA requirements
- Performance tested and documented by Enkon Systems Inc.




Pedestal Controller

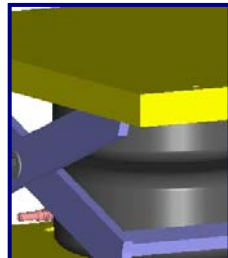

High Strength Steel Construction

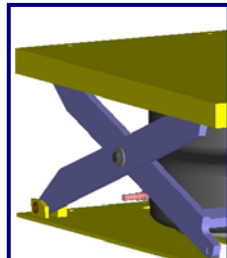

Smooth Steel Solid Top Plate




Maintenance Lock




Safety Relief Pressure Valve

Air Scissor Lift Tables

Nomenclature

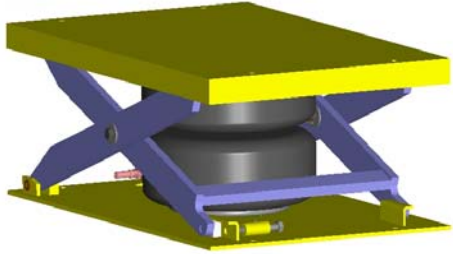

Product type= LSA = Lift Scissor Air
 Lift style = 05
 Capacity = 10 = 1000 pounds
 Raised height = 16"
 Platform size = 25" width x 40" length

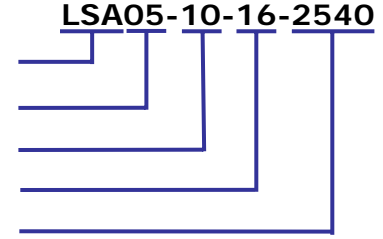

Model LSA05

Values rounded to the nearest 1", see print for actual dimension

Travel (in)	Model	Capacity (lbs)	Lowered		Raised		Platform Size		Base Size	Ship
			Height (in)	Travel (in)	Height (in)	Travel (in)	Width (in)	Length (in)	W x L (in)	Weight (lbs)
11	LSA05-10-16-xxxx	1000	5	11	16	25 - xx	40 - xx	25 x 40	xxx	
11	LSA05-20-16-xxxx	2000	5	11	16	25 - xx	40 - xx	25 x 40	xxx	
11	LSA05-30-16-xxxx	3000	5	11	16	25 - xx	40 - xx	25 x 40	xxx	

Notes:

1. Ship weights are estimated and do not included over size platforms or options
2. Maximum air bag pressure is 100 psi
3. Recommend air line feed pressure is 60 to 120 psi
4. Air consumption is 5 cubic feet per minute (cfm), average. Cubic feet per minute is based on cycle rate. See Enkon Systems website for how to calculate cfm for your application
5. Surface finishes are either powder coat or low VOC's quick dry two stage spray on primer coat and hard enamel top coat
6. Lifts must be center loaded at full capacities
7. Side and end load capacities are de-rated 2% per inch of increase top plate size from base size
8. Safety bellow skirting option must be purchased to meet ANSI and OSHA standards